
NK60/15FT/500G SD

High-performance, highly reliable professional two-stage belt-driven compressor with a galvanized tank.

Professional two-stage compressor designed for heavy-duty use, high reliability and performance. The 500 litre galvanised tank ensures lasting prevention against corrosion caused by water condensation inside. It is also equipped with an oil drain extension, star delta starter and a filter-cup regulator consisting of condensate drain and pressure regulator. Four sturdy feet with anti-vibration mounts make it stable in use.

*Image is for illustrative purposes only

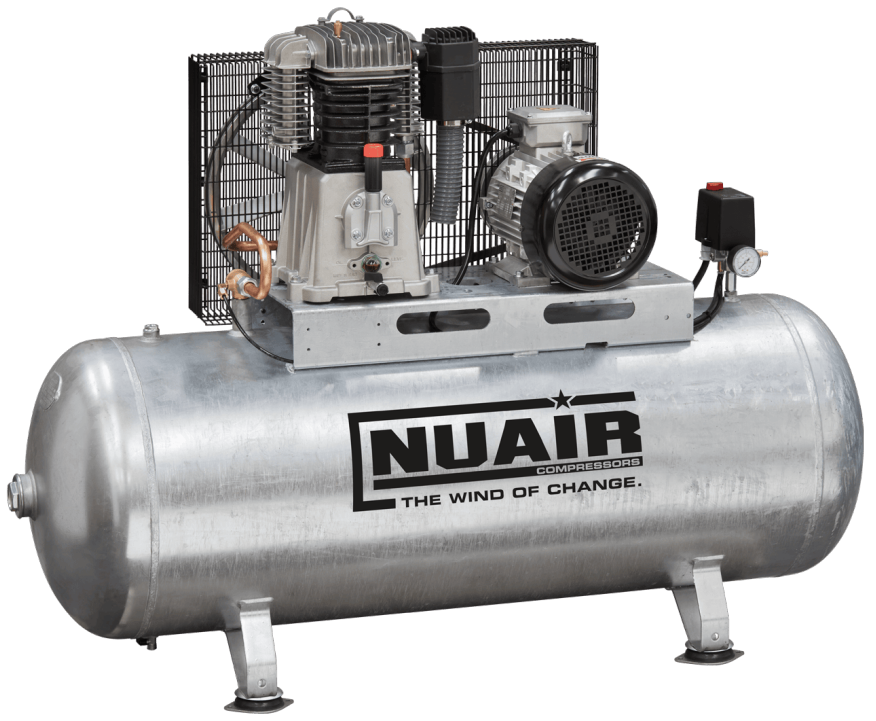

Technical data

Product code		SNTNA05NUA142
Lubrication		Lubricated
Compressor pump		NK60
Air receiver (l)		500
Power	HP	15
	kW	11
Max. pressure	bar	11
	p.s.i.	160
Nr. of cylinders		2
Air displacement	l/min.	1745
	c.f.m.	61,6
R.P.M.		1200
Voltage / Frequency (Volt / Hz)		400 / 50
Type motor		Electric
Gross weight	kg	350
	lb	772
Packaging dimensions LxWxH (mm)		2270x860x1690
EAN code		8016738802337